

a quick one

nativeDSD
MUSIC

Includes FREE DSD album download via
www.nativeDSD.com*

The Audiolab M-ONE integrated amplifier harnesses our acclaimed DAC and amp tech in a single diminutive box. With gripping dynamic contrasts and fast, musical detail it's now possible to experience Audiolab's trademark sound with convenience that will leave you astounded.



USB A (iOS) &
USB B inputs



32bit / 384kHz
Resolution DAC



DSD File
playback



7 user selectable
audio filters



Bluetooth aptX
wireless streaming



Analogue & Digital
inputs



Built-in 40W
per channel amp



Headphone output

M-ONE


Who talks about us...



IAG House, 13/14 Glebe Road, Huntingdon, Cambridgeshire, PE29 7DL, UK
www.audiolab.co.uk

*Participating countries and retailers only

audiolab

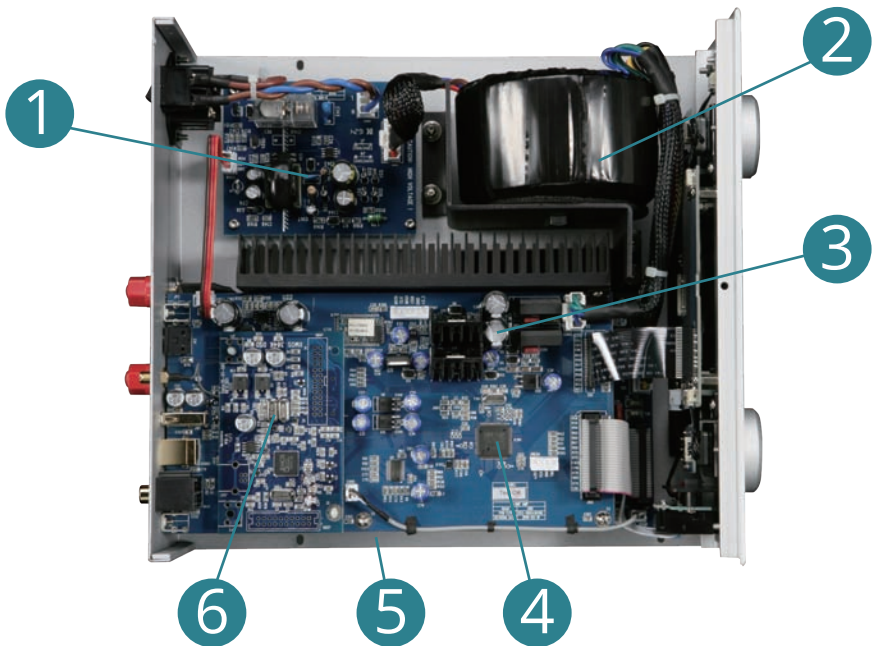

Specifications

General Description	Integrated amplifier with apt-X Bluetooth
Sampling Rate	32-bit / 192kHz (Optical, Coaxial) 32-bit / 384kHz (USB) 2.8MHz (DSD64), 5.6MHz (DSD128), 11.2MHz (DSD256)
Input Sensitivity	515mV
Input Impedance	10K
Inputs	1 x USB A for Apple devices, 1 x USB B for computer, 1 x COAX, 1 x OPT, 1 x Bluetooth, 2 x RCA ,1 x headphone
12v Trigger	Yes
Power Output (8 Ohms)	2 x 40W
Power Output (4 Ohms)	2 x 60W
Frequency Response (-3dB)	10-30kHz
Total Harmonic Distortion (THD)	0.01%
Signal-to-noise Ratio (S/N)	81 (1W @ 1 kHz)
Outputs	Speaker terminals
Height	114mm (including feet)
Width	247mm
Depth	295mm (including connectors and controls)
Net Weight	5.5kg

- 1 Standby Power Supply
- 2 Toroidal Transformer
- 3 Power Supply
- 4 Microprocessor
- 5 Audio PCB underneath with DAC, volume and power and amplifier circuitry
- 6 USB Audio

